查询AOL1426供应商

ALPHA & OMEGA SEMICONDUCTOR

AOT424
N-Channel Enhancement Mode Field Effect Transistor

General Description

The AOT424 uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and low gate resistance. This device is ideally suited for use as a low side switch in CPU core power conversion. Standard Product AOT424 is Pb-free (meets ROHS & Sony 259 specifications). AOT424L is a Green Product ordering option. AOT424 and AOT424L are electrically identical.

Features

V_{DS} (V) = 30V
I_D = 110A (VGS = 10V)
$R_{DS(ON)}$ < 4mΩ (V_{GS} = 10V)
$R_{DS(ON)}$ < 5.5mΩ (V_{GS} = 4.5V)





Absolute Maximum Ratings T_A=25°C unless otherwise noted

Parameter		Symbol	Maximum	Units
Drain-Source Voltage		V_{DS}	30	V
Gate-Source Voltage		V_{GS}	±20	V
Continuous Drain Current [B,G]	T_C=25°C [G]	I_D	110	A
	T_C=100°C [B]		88	
Pulsed Drain Current		I_{DM}	200	
Avalanche Current [C]		I_{AR}	30	A
Repetitive avalanche energy L=0.1mH [C]		E_{AR}	112	mJ
Power Dissipation [B]	T_C=25°C	P_D	100	W
	T_C=100°C		50	
Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 175	°C

Thermal Characteristics

Parameter		Symbol	Typ	Max	Units
Maximum Junction-to-Ambient [A]	t ≤ 10s	$R_{\theta JA}$	14.2	20	°C/W
Maximum Junction-to-Ambient [A]	Steady-State		39	50	°C/W
Maximum Junction-to-Case [C]	Steady-State	$R_{\theta JC}$	0.8	1.5	°C/W

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=250µA, V_{GS}=0V	30			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=24V, V_{GS}=0V			1	µA
		T_J=55°C			5	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}= ±20V			100	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS} I_D=250µA	1	2	3	V
$I_{D(ON)}$	On state drain current	V_{GS}=10V, V_{DS}=5V	110			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=10V, I_D=30A		3	4	mΩ
		T_J=125°C		4.7	6	
		V_{GS}=4.5V, I_D=30A		4.3	5.5	mΩ
g_{FS}	Forward Transconductance	V_{DS}=5V, I_D=30A		106		S
V_{SD}	Diode Forward Voltage	I_S=1A,V_{GS}=0V		0.72	1	V
I_S	Maximum Body-Diode Continuous Current				85	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=15V, f=1MHz		3200	3840	pF
C_{oss}	Output Capacitance			590		pF
C_{rss}	Reverse Transfer Capacitance			414		pF
R_g	Gate resistance	V_{GS}=0V, V_{DS}=0V, f=1MHz		0.54	0.7	Ω
SWITCHING PARAMETERS						
Q_g(10V)	Total Gate Charge	V_{GS}=10V, V_{DS}=15V, I_D=30A		59.6	72	nC
Q_g(4.5V)	Total Gate Charge			30.4	37	nC
Q_{gs}	Gate Source Charge			9.5		nC
Q_{gd}	Gate Drain Charge			19.8		nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=10V, V_{DS}=15V, R_L=0.5Ω, R_{GEN}=3Ω		12.5		ns
t_r	Turn-On Rise Time			35.5		ns
$t_{D(off)}$	Turn-Off DelayTime			40		ns
t_f	Turn-Off Fall Time			32.5		ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=30A, dI/dt=100A/µs		35.3	42	ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=30A, dI/dt=100A/µs		30.7		nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in^2 FR-4 board with 2oz. Copper, in a still air environment with T_A =25°C. The Power dissipation P_{DSM} is based on steady-state $R_{\theta JA}$ and the maximum allowed junction temperature of 150°C. The value in any given application depends on the user's specific board design, and the maximum temperature of 175°C may be used if the PCB or heatsink allows it.

B. The power dissipation P_D is based on $T_{J(MAX)}$=175°C, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used. It is used to determine the current rating, when this rating falls below the package limit.

C: Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}$=175°C.

D. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to case $R_{\theta JC}$ and case to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using <300µs pulses, duty cycle 0.5% max.

F. These tests are performed with the device mounted on 1 in^2 FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The SOA curve provides a single pulse rating.

G. The maximum current rating is limited by the package current capability.

Rev2: August 2005

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

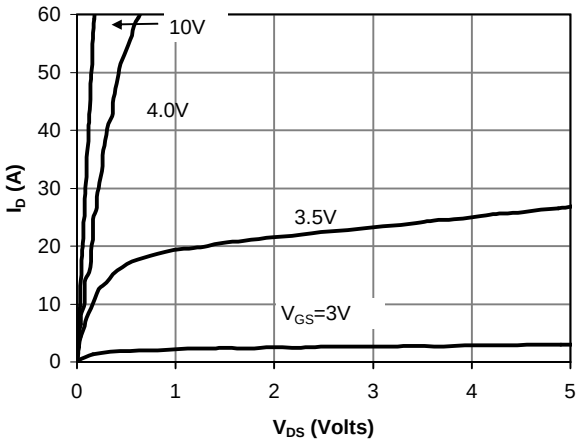

Fig 1: On-Region Characteristics

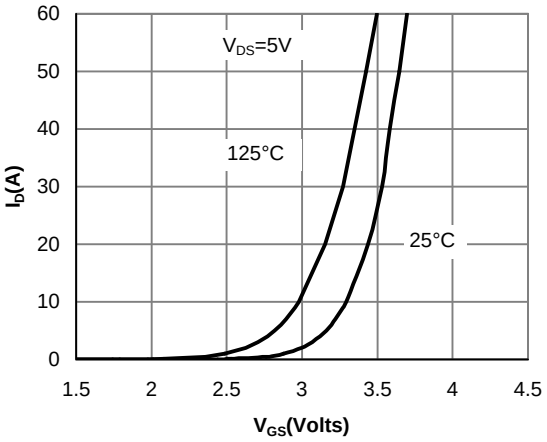

Figure 2: Transfer Characteristics

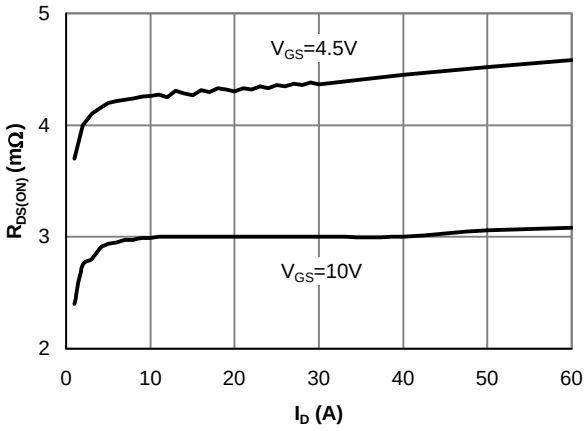

Figure 3: On-Resistance vs. Drain Current and Gate Voltage

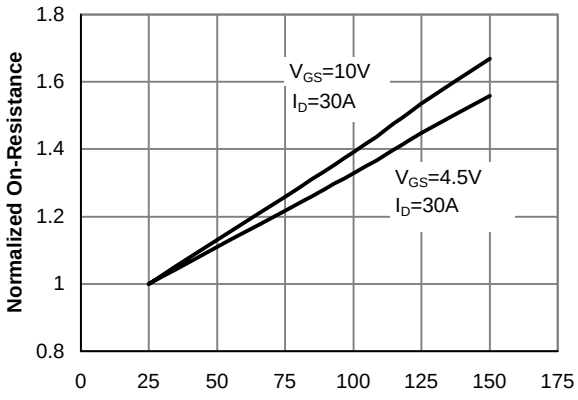

Figure 4: On-Resistance vs. Junction Temperature

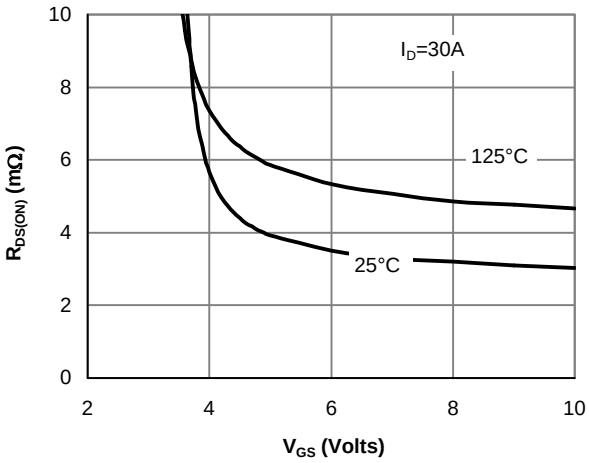

Figure 5: On-Resistance vs. Gate-Source Voltage

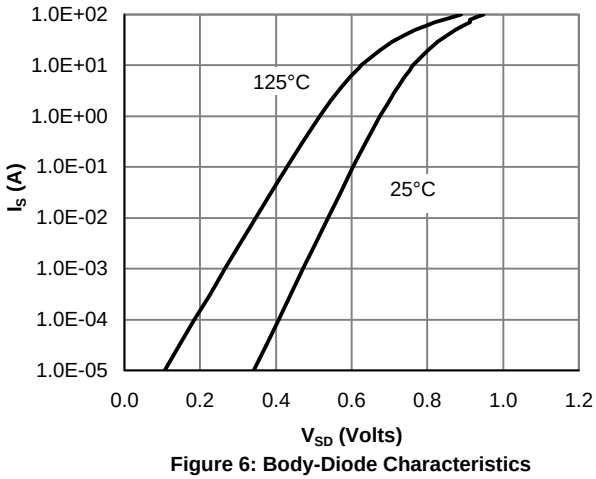

Figure 6: Body-Diode Characteristics

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

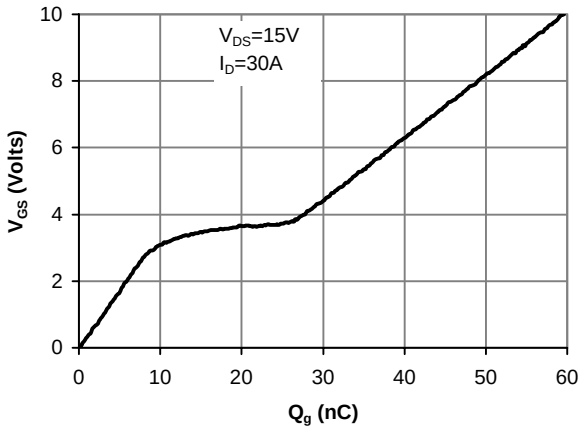

Figure 7: Gate-Charge Characteristics

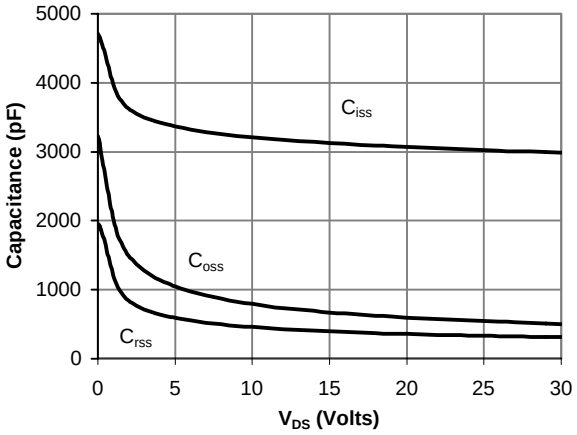

Figure 8: Capacitance Characteristics

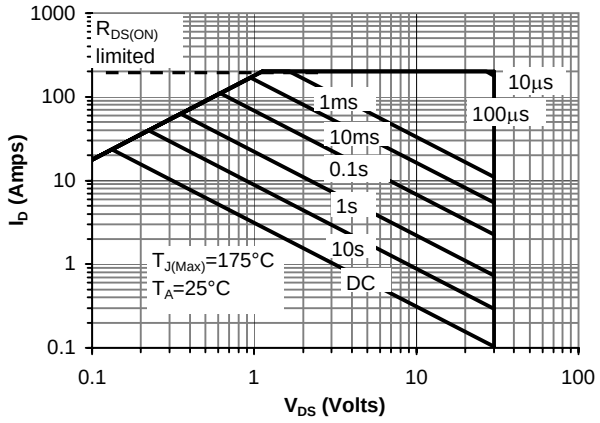

Figure 9: Maximum Forward Biased Safe Operating Area (Note F)

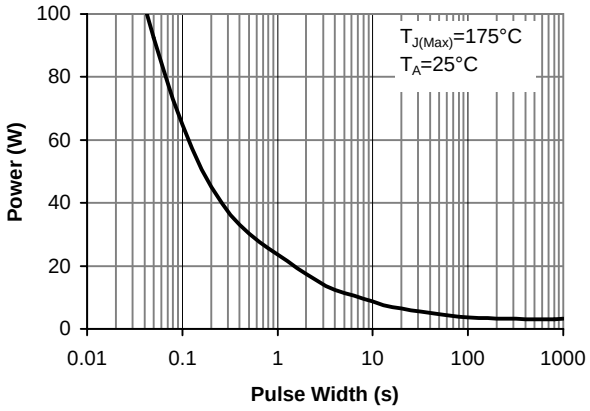

Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note F)

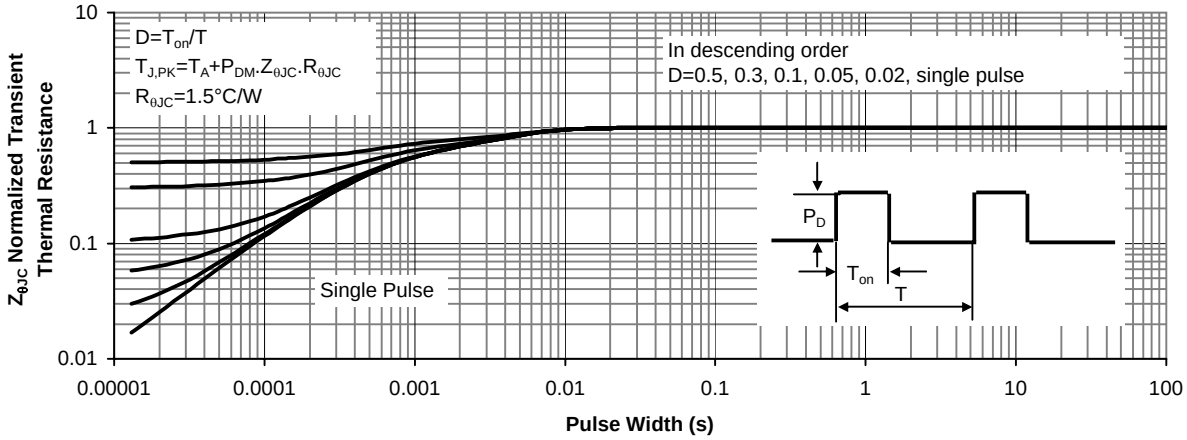

Figure 11: Normalized Maximum Transient Thermal Impedance (Note F)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

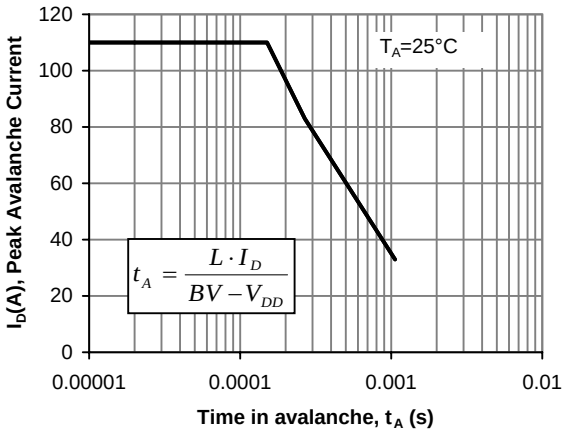

Figure 12: Single Pulse Avalanche capability

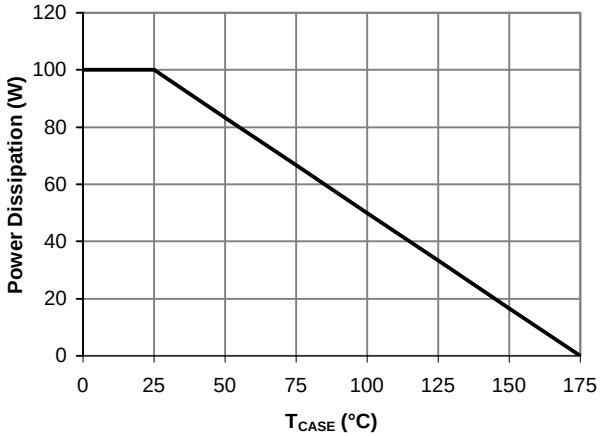

Figure 13: Power De-rating (Note B)

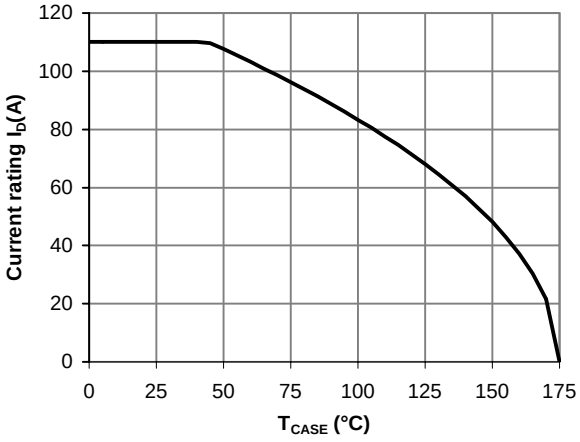

Figure 14: Current De-rating (Note B)

中发网 WWW.ZFA.CN
全球最大的PDF中文下载站

中发网
www.zfa.cn

PDF 资料下载尽在中发网

版权所有 中发飞询 京ICP证041662号 Copyright © 2004-2005 www.zfa.cn All Rights Reserved
客 服 热 线： 深圳 0755-83278916，83278919 北京 010-62632888，62636888